

Non-Contact Temperature Measurement

DIGITAL – INFRARED – PYROMETER

Temperature range 100 to 2500°C (212 - 4532°F)

**Temperature control during glass production process
compact units – Infrared – measuring transducer and electronic process
unit in one case with light beam aiming device
or optical viewfinder, focusable optic,
serial interface, limit output**

Series KTRD 1550



MAURER – Infrared – pyrometer can also assist you to monitor your heating processes, ensuring a uniform standard of quality for your products.

leaflet KTRD 1550



<http://www.maurer-ir.de>

**Dr. Georg Maurer
GmbH
Optoelektronik**

**Industriegebiet 10
D-72664 Kohlberg**

**Telefon +49(0)7025-9219-0
Telefax +49(0)7025-9219-20
Email: info@maurer-ir.de**

Infrared-Digital-Pyrometer Series KTRD 1550

More than 60 years experience in the area of non-contact temperature measurement and permanently development of the pyrometers makes it possible to offer you a complete program of field tested units.. Mainly for **fast warming processes** the **contactless temperature measurement** is suitable.

The **series KTRD 1550** are **digital part radiation pyrometer** with vario-objective in compact structure likewise suitable for industry, research and laboratory.

With the integrated light beam aiming device (green LED or Laser) resp. viewfinder an adjusting of the pyrometer to the measuring object is very easy.

The temperature linear analog output signal 0/4 up to 20 mA is available for measuring- and controlling purposes. The simultaneous using of the serial interface with the software IR-LOG enables the data detection, graphical representation and the parameter settings of the pyrometer.


Examples for applications:

ceramics, glas

Technical datas:		
Unit types	KTRD 1550-1	KTRD 1550-2
Target marking	light beam aiming device green LED or laser	viewfinder
Temp. measuring ranges:	MR 1: 100 - 1800°C 212 - 3272°F	MR 2: 300 - 2500°C 572 - 4532°F
Response time (t90)	5 ms	0,5 ms
Spectral range	5,0 µm	
Measuring uncertainty	0,5% of meas.value in °C ± 1°C (ε = 1, Tamb. = 23°C, T 95 = 1s)	
Reproducibility	0,1% of meas.value in °C ± 1°C (ε = 1, Tamb. = 23°C, T 95 = 1s)	
Emission factor ε	100 - 10 % adjustable at the unit or through interface	
Analog output	0 - 20 mA or 4 - 20 mA , load max. 500R	
Part measuring ranges:	free adjustable within the measuring range	
Resolution	< 0,1% analog output, < 0,1°C at interface	
1 limit output (open coll.)	24 V DC / max. 100 mA	
Max.reading memory	max.memory, double memory,adjustable time and threshold value, erasing after time, external contact, by software, after new meas.part	
Interface	RS 232 isolated ± 50 V or RS 485 isolated 2500VRMS options: PROFIBUS, PROFINET, Ethernet, EtherCAT, USB 2.0	
Software IR-LOG	data recording, graph.representation, setting of pyrometer parameters	
adjustable parameter with Software IR-LOG	emissionfactor,switching output,analog output, part meas.range, °C/°F, max.memory, average value, light beam aiming device switchable	
Objectives	for accommodation to the measuring application an extensive selection of objectives are available	
Working temperature	pyrometer 0 - 50°C (32-122°F), optic system up to 150°C(302°F)	
Stock temperature	- 10°C - + 70°C (14-158°F)	
Temperature sensitivity	0,05 % / °C	
Humidity tolerance	35 - 85 % RF (non condensing)	
Operating voltage	24 V DC ± 10 % or 18 V AC ± 10 % < 160 mA	
Unit connection	12-pole plug-connector	
Dimensions: H / W / D	54 x 54 x 147 mm (2,13 x 2,13 x 5,79 inch) ALU-case	
Weight	0,6 kg (1,32 lbs)	
Protection grade	IP 65	
Option	built in digital display	

mechanical assembly	electrical assembly		
Execution in cooling case	AED 1012	electr.process unit	digital display (built in-execution)
Blowing device	AED 1012-C	PID controller	connection cable 12-pole
Mirror 90°	AED 1012-PC	Program controller	line scanner SC 1000 / SC 1012
Mounting parts	power supply 100-270VAC - 24 VDC	PC-Box (USB – connection set)	

Optic table for KTRD 1550

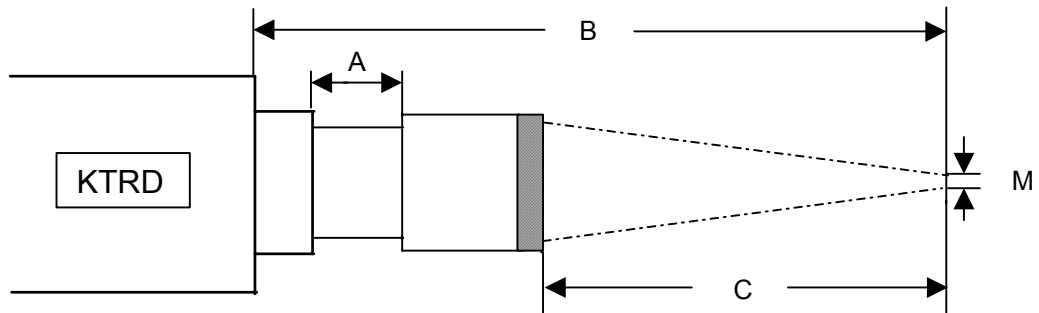


Optic type	: IR 2050-T (CaF2)		
Lens	: f 50 25,4 Ø		
meas. aperture	: 0,7 mm Ø		
radiation aperture	: 8,5 mm Ø		
Meas. distance from casing of meas. Head	Meas. distance from optic front edge	Optic extension	Target size
B / mm	C / mm	A / mm	M / mm = Ø
220,0	186,0	13,0	2,6
300,0	270,0	9	3,6
400,0	372,5	6,5	5,1
500,0	474,0	5,0	6,8
800,0	775,9	3,1	10,8
1000	977,0	2,0	14,0
2000	1978,0	1,0	29,4
3000	2978,4	0,6	44,1
5000	4978,8	0,2	74,9

Target = 95 % of beam density of the surface

Dr. Georg Maurer GmbH – OPTOELEKTRONIK –
 Industriegebiet 10 D-72664 Kohlberg Telefon +49(0)7025-9219-0 Telefax +49(0)7025-9219-20




Reg.-Nr.: Q1 0201014

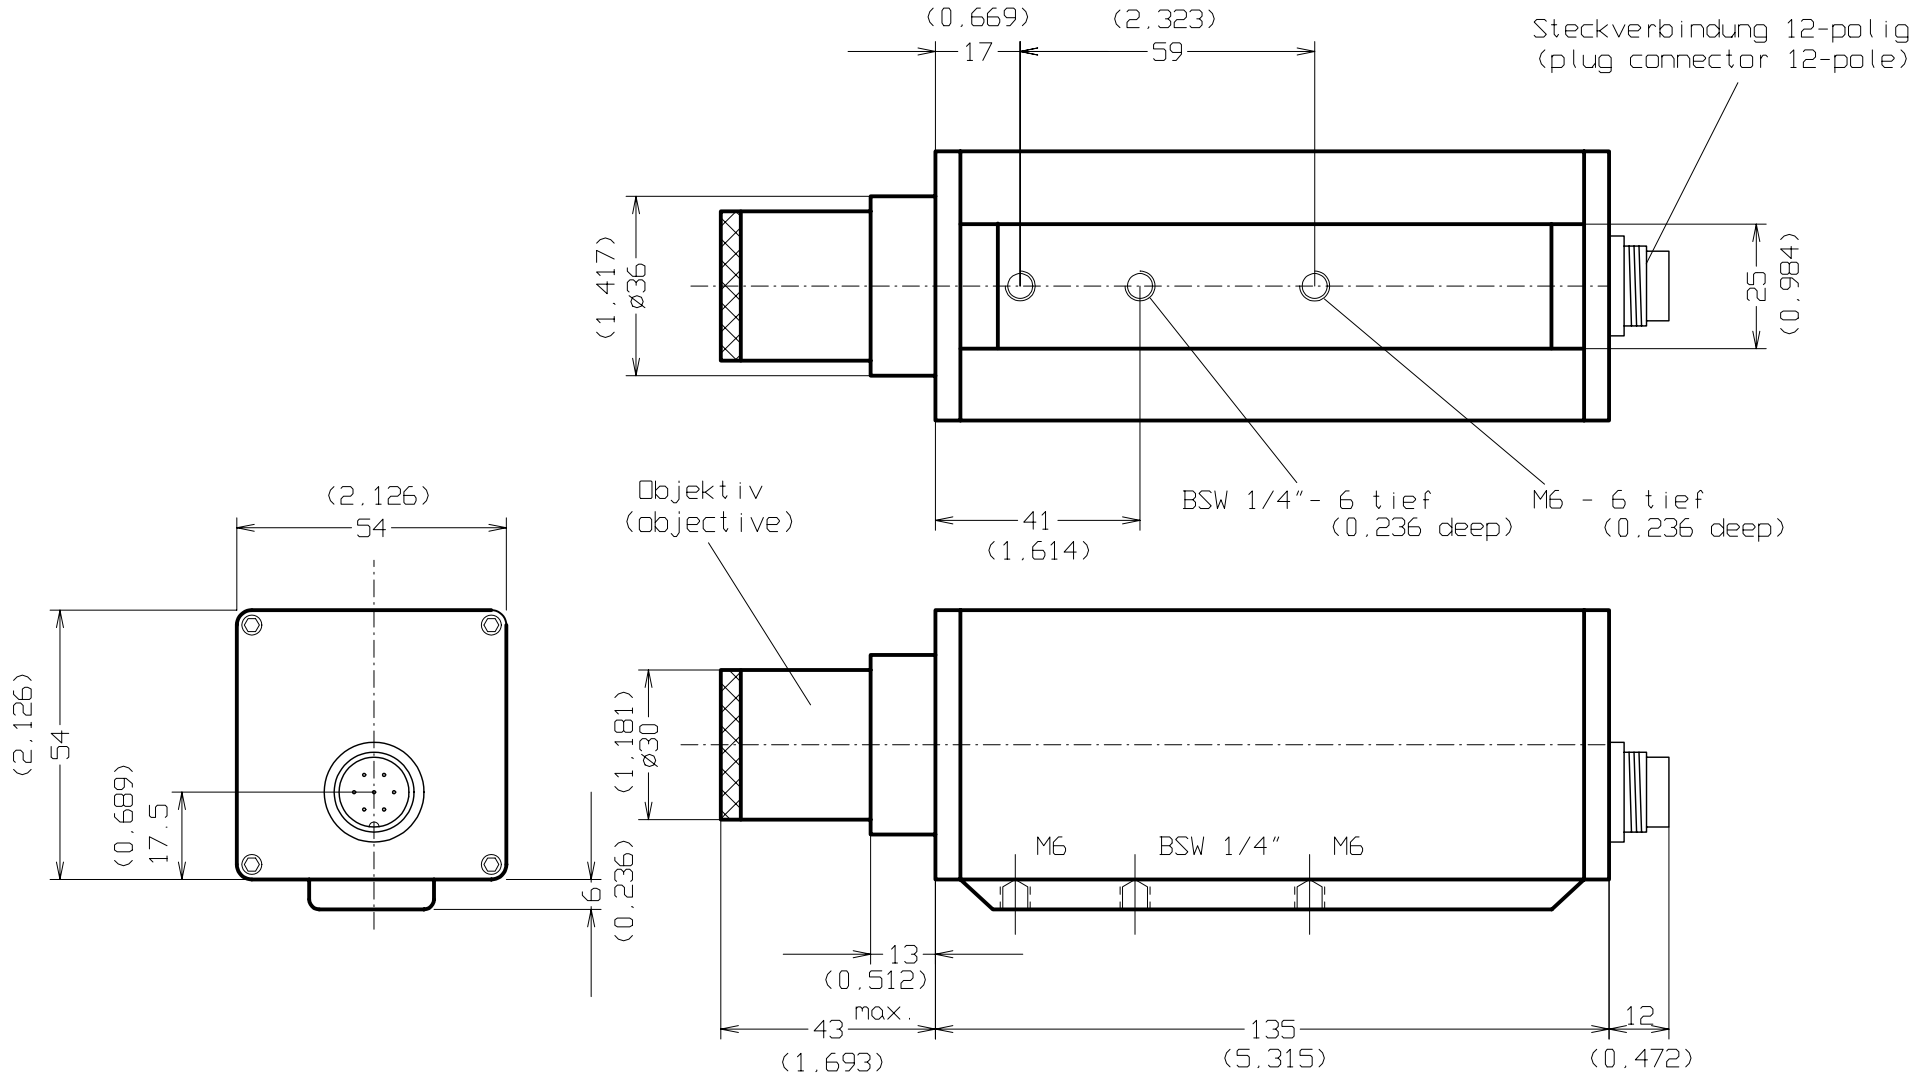

(xxx) - Maße in Zoll
(dimensions inch)

				Maßstab 1:1	
				Fa. Dr. Maurer GmbH	
				STANDARDGEHÄUSE (standard case)	
				KTRD 1000-1	
				Blatt	
				Bl.	
				100205	
Zust	Änderung	Datum	Name		

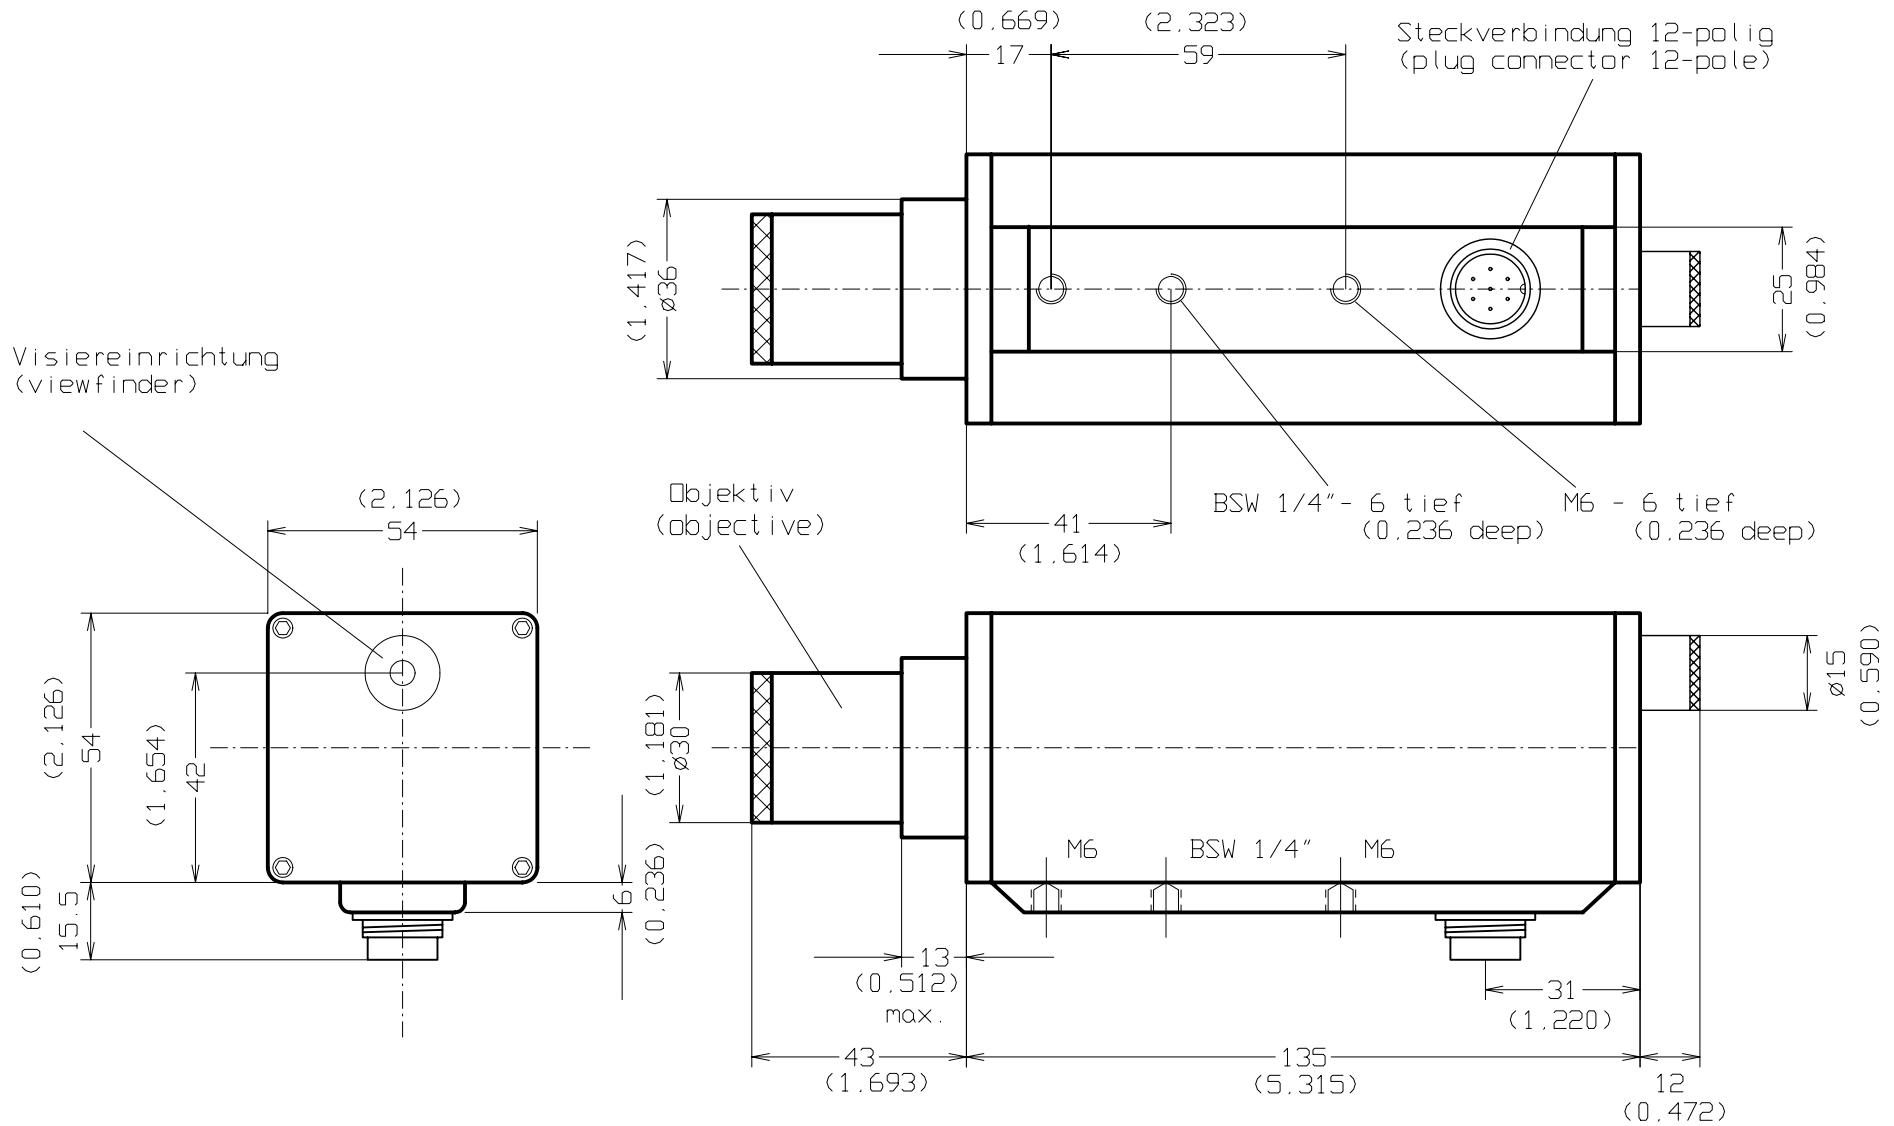

(xxx) - Maße in Zoll
(dimensions in inch)

				Maßstab 1:1	
				Fa. Dr. Maurer GmbH	
				STANDARDGEHÄUSE (standard case)	
				KTRD 1000-2 Stecker 90° (connector 90°)	
				Visiereinrichtung (viewfinder)	
				Blatt	
				Bl.	
				100207	
Zust	Änderung	Datum	Name		